


# DRAG SCRAPERS

## DS SERIES

25-75 HP ● 5' - 7'

## RDS SERIES

75-175 HP ● 8',10',12'

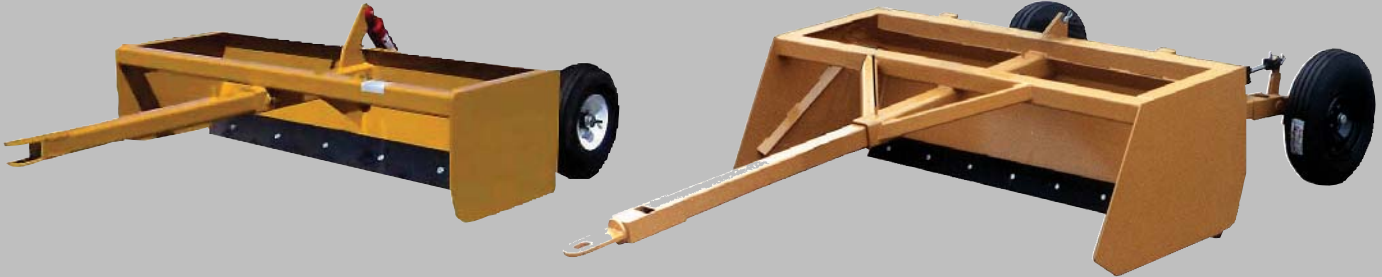

DS & RDS SERIES DRAG SCRAPERS: **DS Series** are extremely versatile. These scrapers are designed to level ditches, build terraces, fills in low spots, clean sheds and pens, repair roads, spread gravel and other miscellaneous earth-moving applications. Available in 5', 6', & 7' sizes from 3/8 to 7/8 cubic yard capacities for tractors 25 to 75 HP. Equipped with two 5.70-8 (Load range B) tires. 1/2" x 6" reversible cutting edge, clevis style tongue. Requires one 2" x 6" double acting hydraulic cylinder and hoses. **RDS Series** are heavy-duty and designed for a variety of applications such as general earth moving, road repairs, leveling ditches, building terraces, filling low spots and spreading topsoil. Available in 8', 10', and 12' sizes from 2 1/2 to 3 3/4 cubic yard capacities. Equipped with two 15" wheels less tires, 1/2" x 6" reversible cutting edge, 3/8" x 30" high x 40" long side plates and removable 4" x 4" swivel tongue. Features 12" clearance when raised. Equipped with a manual tilt feature. Requires one or two 3" x 8" double acting hydraulic cylinder and hoses and two G70 x 15" tires.

### SPECIFICATIONS

MODELS	DS COMPACT SERIES	RDS SERIES
WORKING WIDTH	5', 6', 7'	8', 10', 12'
MOLDBOARD HEIGHT & THICKNESS	1/4" x 18"	1/4" x 24"
SIDE PLATES	3/8" x 18" x 24"	3/8" x 30" x 40"
TONGUE	3" x 3" x 3/16" Fixed	4" x 4" x 3/8" Bolt On
APPROXIMATE WEIGHT	500 (5'), 550 (6'), 600 (7')	1450 (8'), 1650 (10'), 1860 (12')
APPROXIMATE HP RANGE	25 to 75	75 to 175
TIRES	Equipped with (2) 5.70-8 Load Range B Tires	Less Tires, Required (2) G70 x 15 Tires
HYDRAULICS	Requires (1) 2" x 6" Dbl. Acting Cylinder and Hoses	*Requires (1 or 2) 3" x 8" Dbl. Acting Cylinder and Hoses
TILT	N/A	Standard
CAPACITY	7/16 Cu. Yd. (5') 1/2 Cu. Yd. (6'), 5/8 Cu. Yd. (7')	2-1/2 Cu. Yd. (8'), 3-1/8" Cu. Yd. (10') 3-3/4 Cu. Yd. (12')
MOLDBOARD CUTTING EDGE	1/2" x 6" Reversible	1/2" x 6" Reversible

Rugged, Labor and Time Saving Products