



ARROWHEAD
ROCKDRILL BREAKERS

HYDRAULIC BREAKERS

S SERIES

Excavators, Backhoes, Compact Excavators & Skid Steer Loaders



- Delivers high frequency at lower engine R.P.M.
- Only two moving parts
- Primary and secondary dampening blocks
- No bolts in base unit to reduce maintenance
- Lower guaranteed sound power levels
- Vibrosilencing system reduces vibration to operator and machine
- High quality, modern hammers at surprisingly low prices



ARROWHEAD ROCKDRILL BREAKERS feature state of the art technology in hammer design. Arrowhead has a complete range of hammers to suit your needs from 175 to 8000 ft. lbs. This simple design includes only two moving parts and dual dampening blocks which provide low sound levels and reduced vibration. Designed to produce high blows per minute at lower engine R.P.M.'s with excellent serviceability. Arrowhead breakers furnish all the power needed for the toughest jobs all within one of the most compact designs available. Mounting brackets are available for most backhoes, skid steer loaders and excavators.

RANKIN

Innovative Products Designed to Save Time & Labor


www.rankineqco.com




ARROWHEAD
ROCKDRILL BREAKERS

HYDRAULIC BREAKERS

This cutaway view of the Arrowhead hammer shows the simple, unique design which gives long, trouble-free usage with minimal down time.

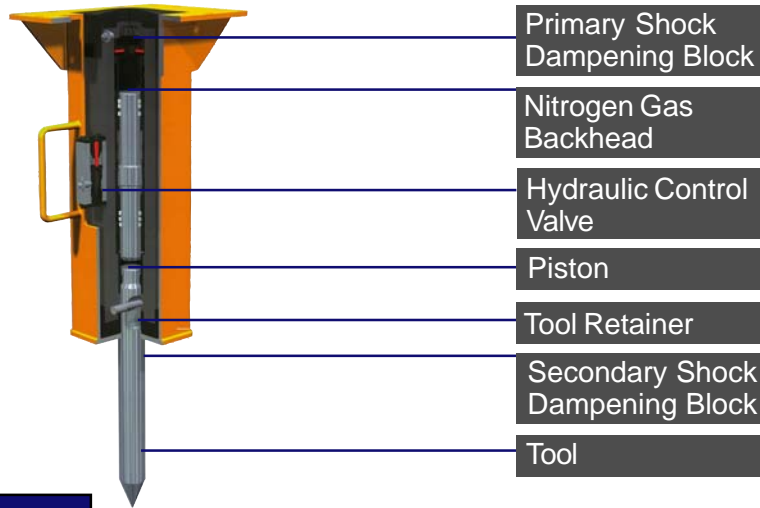

CUTTING EDGE DESIGN

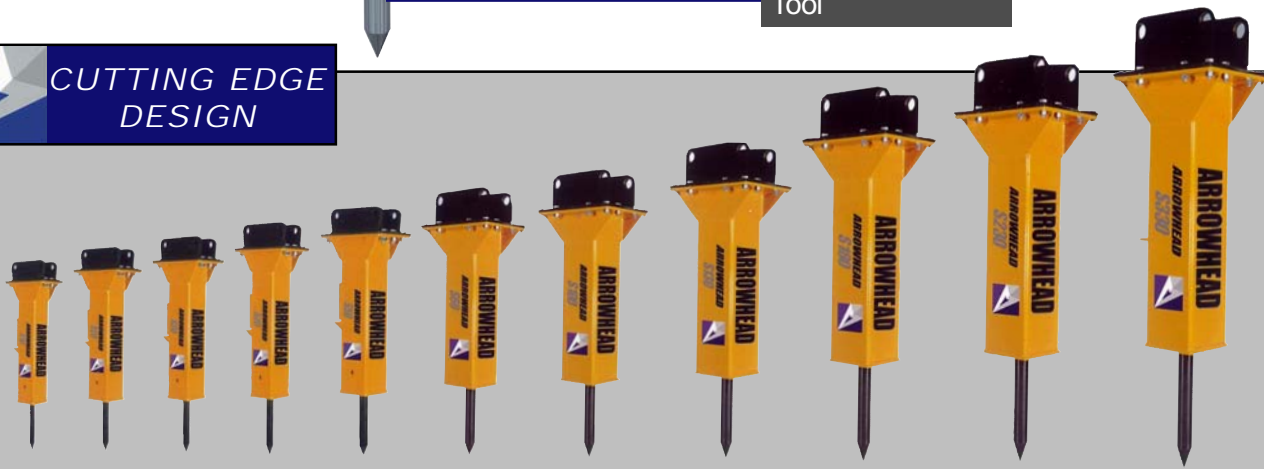

MODELS	S10	S20	S30	S40	S50	S60	S100	S130	S180	S230	S330
MAX. ENERGY PER BLOW/FT. LBS.	175	250	450	550	750	850	1250	1750	2250	4000	8000
REQ'D FLOW/GPM	4-7	5-10	8-13	8-16	12-21	14-26	18-29	20-32	24-39	39-53	40-55
OPERATING PRESSURE/PSI	1525	1350	1600	1650	1700	1800	1800	1900	1900	1900	2550
BLOWS/MINUTE	650-1100	650-1150	700-1250	550-1250	650-1400	550-1200	550-1200	650-1200	400-700	400-700	400-700
TOOLS DIAMETER/ INCHES	1.60	1.80	2.10	2.60	2.75	3.00	3.75	4.10	4.40	5.25	6.30
OVERALL LENGTH/ INCHES	42	46	51	57	60	63	65	72	74	90	102
WORKING WEIGHT/ LBS.	168	220	303	505	575	725	1078	1218	2178	3810	5425
GUARANTEED SOUND POWER/DB	112	115	117	118	119	121	123	123	125	127	131
CARRIER WEIGHT	1560-2250	2250-6750	4450-8890	5600-11000	8200-16800	9000-18700	18000-24200	22400-31400	29000-43400	4000-61500	60000-110000

Specifications subject to change without notice



2521 River Rd. (98902), P.O. Box 0168, Yakima, Washington 98907-0168
Phone: (800) 426-2009 ● (509) 453-8271 ● Fax: (509) 457-2456

www.rankineqco.com